



Powerware

Powerware® PF2 Flywheel

Energy Storage System



Features

Maximum Availability

- Powerware PF2 can parallel up to eight flywheels to increase ride-through time or provide redundancy
- N+1 configurable
- Fast recharge time (under 150 seconds)

Maximum Reliability

- Long, useful life
- Self-diagnostics
- Remote notification (e-mail and/or paging)
- Remote monitoring (network and/or modem)
- LCD monitor/control panel
- Microprocessor-based monitoring system
- Alarm status contacts
- Log file stores up to 2000 events

Maximum Performance

- Soft-start UPS integration
- High power density (very small footprint)
- 99% efficient
- Quiet operation
- No special facility requirements
- Low maintenance cost
- Adjustable voltage setting
- Battery hardening capability
- On-board DC disconnect
- Simple plug and play installation

Input Specifications

Float voltage range:	400 to 600 volts DC
Minimum charging current required:	15 ADC (250 kW)
	30 ADC (500 kW)

Output Specifications

Adjustable nominal discharge voltage range:	360 to 550 volts DC
Maximum rated power:	between 480 VDC and 550 VDC
DC voltage regulation:	±1% steady state
DC ripple:	<2%

As systems availability becomes increasingly fundamental to survival in today's worldwide economy, Eaton, a leader in technology introduces Powerware PF2. From data centers to industrial plants, wherever maximum productivity and system availability is critical, the Powerware PF2 bridges the power gap during utility disturbances and acts as an effective enhancement or replacement for traditional battery systems.

The Powerware PF2, a DC battery-free energy storage technology, is an integrated motor-generator-flywheel that stores kinetic energy in a constantly spinning, quiet, low friction steel disc. Compared to traditional battery systems, the Powerware PF2 dramatically reduces space requirements, temperature restrictions, replacement cycles and main-

tenance costs while improving UPS system reliability and operational integrity.

The Powerware PF2 offers a number of benefits over traditional energy storage systems:

- Flexible siting
- Reduced maintenance cost
- Over 20 years of useful life
- High power density in a small footprint
- Non-toxic and non-corrosive
- Real-time monitoring of over 25 system parameters
- Simple connections

POWERWARE PF2 RIDE-THROUGH TIMES

Powerware UPS Models	UPS Output	Percent kW	Output kW	Powerware Flywheel Models				
				PF2-250	PF2-500	PF2-750 (PF2-250+PF2-500)	PF2-1000 (2x PF2-500)	
Ride-through to the Load in Seconds								
9315-160	100 kVA	50%	40	76	120	120	120	
		75%	60	51	101	120	120	
		100%	80	38	76	114	120	
	130 kVA	50%	52	58	117	120	120	
		75%	78	39	78	117	120	
		100%	104	29	58	88	120	
	160 kVA	50%	64	47	95	120	120	
		75%	96	32	63	95	120	
		100%	128	24	48	71	96	
9315-225	225 kVA	50%	90	34	68	101	120	
		75%	135	23	45	68	91	
		100%	180	17	34	51	69	
9315-300	300 kVA	50%	120	25	51	76	103	
		75%	180	17	34	51	69	
		100%	240	13	25	38	51	
9315-500	400 kVA	50%	160	19	38	57	77	
		75%	240	13	25	38	51	
		100%	320		19	29	39	
	500 kVA	50%	200	15	30	46	62	
		75%	300		20	31	41	
		100%	400		15	23	31	
	9315-750*	625 kVA	50%	250		24	36	50
			75%	375		16	25	33
			100%	500			18	25
750 kVA		50%	300		20	32	43	
		75%	450			21	27	
		100%	600			16	21	

*.8 output power factor. Consult factory for ride-through times for .9 output power factor

Environmental Specifications


Operating temperature:	-20°C to 40°C
Non-operating temperature:	0°C to 70°C
Relative humidity:	<95% non-condensing
Altitude:	Up to 4,000 ft. (1220 meters) with no derating
Audible noise:	72 dBA at 1 meter; in accordance with ISO 7779
Typical heat dissipation:	<3 kW or 10,250 BTU (250 kW) or <5 kW or 17,050 BTU (500 kW)
System dimensions:	42" W x 34" D x 78" H (107 cm. W x 86 cm. D x 198 cm. H)
Cabinet footprint:	10 sq. ft. (.93 sq. m.) (no rear or side access required)
Weight:	250 kW - 3,800 lbs. (1724 kgs)
	500 kW - 6,000 lbs. (2727 kgs)

UNITED STATES
8609 Six Forks Road
Raleigh, NC 27615 U.S.A.
Toll Free: 1.800.356.5794
or 919.872.3020

www.powerware.com

CANADA
Ontario: 416.798.0112

LATIN AMERICA
Argentina: 54.11.4343.6323
Brazil: 55.11.3616.8500
México: 52.55.5488.5252

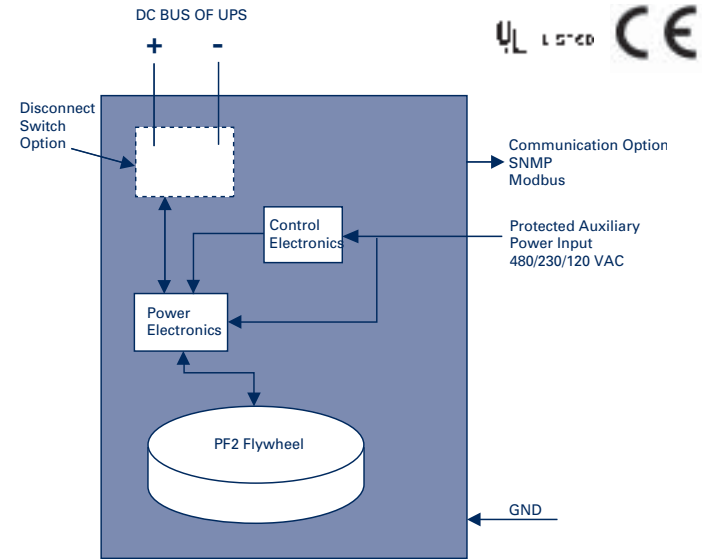

EUROPE/MIDDLE EAST/AFRICA
Denmark: 45.3686.7910
Finland: 358.94.52.661
France: 33.1.6012.7400
Germany: 49.7841.666.0
Italy: 39.02.66.04.05.40
Norway: 47.23.03.65.50
Sweden: 46.8.598.940.00
United Kingdom: 44.1753.608.700

ASIA PACIFIC
Australia/NZ: 61.2.9878.5000
China: 86.21.6361.5599
HK/Korea/Taiwan: 852.2745.6682
India: 91.11.2649.9414 to 18
Singapore/SEA: 65.6829.8888

Powerware and PowerVision are trade names, trademarks, and/or service of Eaton Power Quality Corporation and its subsidiaries or affiliates. All other trademarks are property of their respective owners.

© 2005 Eaton Corporation
All Rights Reserved
Printed in USA
PLS44FXA
June 2005

